

EA200

400VA ~ 3000VA




Features


- LED display or LCD display selectable
- Microprocessor-based digital control
- Boost and buck AVR for voltage stabilization
- Auto sensing frequency
- Wide input voltage range
- Power-on self test
- Cold start
- Auto restart when mains power is restored
- Auto track mains phase to ensure that inverter output voltage has same phase with utility voltage, reducing transfer time and peak surge
- Intelligent battery management: battery temperature compensation to extend the battery life; three-stage charging to shorten recharge time
- Short circuit, battery overcharge / overdischarge, overload, surge protections
- Automatic charging in OFF mode
- Optional no-load shutdown
- Optional RS232 / USB communication port and RJ11 / RJ45 protection
- Unattended safety shutdown: system alarm and auto Power-On / Off by RS232 or USB interface communicating with PC

Rear Panel

1. Output Outlets (selectable)
2. TEL/Modem/Fax surge protection (optional)
3. USB (optional)
4. AC Input
5. Fuse
6. AC Breaker
7. Fan



Optional outlets

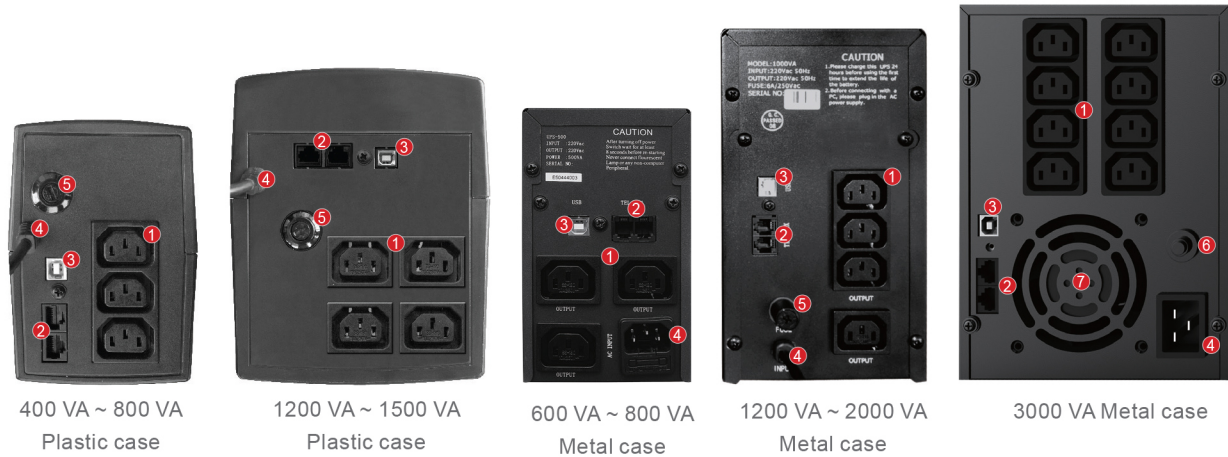

Specifications

MODEL		EA240	EA260	EA280	EA2120	EA2150	EA2200	EA2300
Capacity		400 VA 240 W	600 VA 360 W	800 VA 480 W	1200 VA 720 W	1500 VA 900 W	2000 VA 1200 W	3000 VA 1800 W
INPUT								
Voltage		100 / 110 / 120 V: 80 ~ 150 Vac; 220 / 230 / 240 V: 162 ~ 295 Vac (145 ~ 295 Vac optional)						
Frequency		50 / 60 Hz ± 10% (auto-sensing)						
OUTPUT								
Voltage		100 / 110 / 120 Vac ± 10% or 220 / 230 / 240 Vac ± 10%						
Frequency		50 / 60 Hz ± 1% (auto-sensing)						
Waveform		Mains mode: pure sine wave; Battery mode: simulated sine wave						
Transfer time		Typical 8 ms, 10 ms max.						
BATTERIES								
DC voltage		12 V			24 V			48 V
Configuration		12 V / 4.5 Ah × 1	12 V / 7.0 Ah × 1	12 V / 8.0 Ah × 1	12 V / 7.0 Ah × 2	12 V / 8.0 Ah × 2	12 V / 9.0 Ah × 2	12 V / 9.0 Ah × 4
Recharge time		6 ~ 8 h						
OTHERS								
Protections		Short circuit - battery overcharge – overdischarge – overload - surge						
Communications		USB / RS232 (optional)						
Humidity		20 ~ 90% RH @ 0 ~ 40°C (non-condensing)						
Noise level		≤ 45 dB (1 m)						
Plastic case	Net / Gross weight (kg)	3.7 / 4.0	4.3 / 4.6	5.2 / 5.5	8.6 / 9.0	10.1 / 10.5	/	/
	Dimensions (W × D × H) (mm)	100 × 290 × 140			140 × 345 × 170		/	/
	Packaged dimensions (W × D × H) (mm)	139 × 335 × 210			198 × 406 × 245		/	/
	Quantity / 20 ft	2300 pcs			1000 pcs		/	/
Metal case	Net / Gross weight (kg)	/	5.1 / 5.4	6.3 / 6.6	9.6 / 10.1	11.3 / 11.7	12.9 / 13.3	19.3 / 20.6
	Dimensions (W × D × H) (mm)	/	95 × 320 × 160		125 × 320 × 225		125 × 380 × 225	157.5 × 452 × 211
	Packaged dimensions (W × D × H) (mm)	/	145 × 375 × 230		180 × 390 × 295		180 × 450 × 295	238 × 536 × 295
	Quantity / 20 ft	/	2000 pcs		1000 pcs			658 pcs

- All specifications are subject to change without notice.
- Custom-made specifications are acceptable.